

QLS410 LED

131-9410

1/3

we-ef



Description



IP66, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lenses. Two cable entries.

| | |
|-----------------------------------|--|
| Beam Type | symmetric, narrow beam up and medium beam down |
| Lamp Type | LED 2x3/12W / 700 mA - 3000 K |
| Gear Type | EC |
| Nominal Luminous Flux (lm) | |
| LED Lumens | 246 lm |
| LEDs | 6 |
| Total Lumens | 1476 lm |
| Tj | 85 °C |
| Rated Luminous Flux (lm) | |
| LED Lumens | 175.8 lm |
| Total Lumens | 1054.8 lm |
| Ta | 25 °C |
| Rated Input Power | 15 W |

QLS410 LED

131-9410

2/3

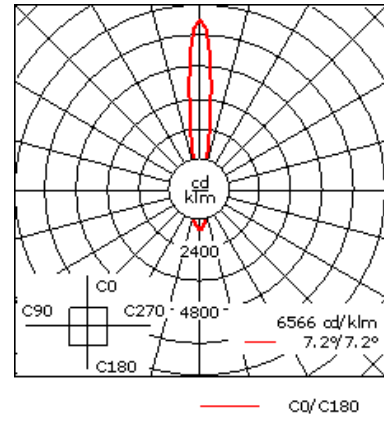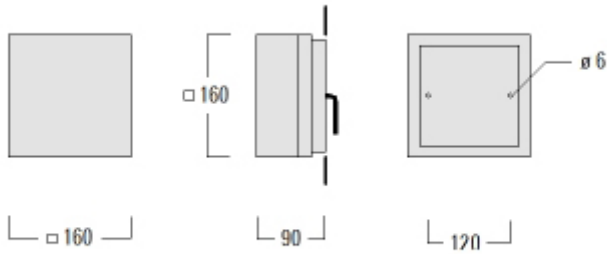

QLS410 LED

131-9410

3/3

we-ef

Electrical Accessories

Analogue dimming interface

Analogue dimming interface

| | Weight (kg) | L1 |
|--|-------------|----|
| ■ 430-0011 1-10V analogue dimming interface | 0.00 | 0 |



DALI Interface

DALI Interface

| | Weight (kg) | L1 |
|----------------------------------|-------------|----|
| ■ 430-0013 DALI interface | 0.00 | 0 |

