

# QLS410 LED

131-9410

1/3

**we-ef**



## Description



IP66, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lenses. Two cable entries.

<b>Beam Type</b>	symmetric, narrow beam up and medium beam down
<b>Lamp Type</b>	LED 2x3/12W / 700 mA - 3000 K
<b>Gear Type</b>	EC
<b>Nominal Luminous Flux (lm)</b>	
LED Lumens	246 lm
LEDs	6
Total Lumens	1476 lm
Tj	85 °C
<b>Rated Luminous Flux (lm)</b>	
LED Lumens	175.8 lm
Total Lumens	1054.8 lm
Ta	25 °C
<b>Rated Input Power</b>	15 W

# QLS410 LED

131-9410

2/3

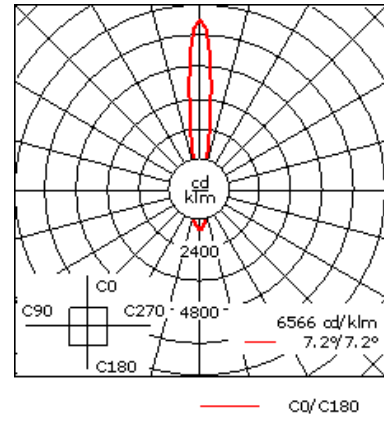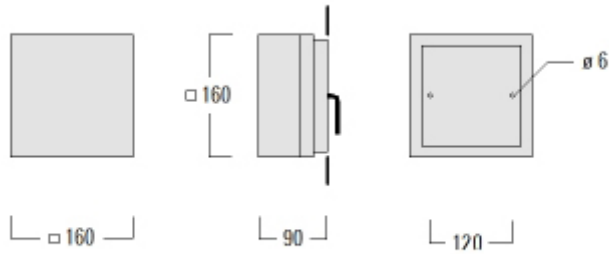

# QLS410 LED

131-9410

3/3

**we-ef**

---

## Electrical Accessories

---

### Analogue dimming interface

Analogue dimming interface

	Weight (kg)	L1
■ <b>430-0011</b> 1-10V analogue dimming interface	0.00	0



---

### DALI Interface

DALI Interface

	Weight (kg)	L1
■ <b>430-0013</b> DALI interface	0.00	0

