

Product information Lunexo H2 CDP-I 8800 840 ETDD 01

TOC: 6825851



Luminaire type

Exclusive rectangular suspended LED luminaire with rounded corners and visible light edge.

Applications

For innovative and prestigious office lighting.

Mounting methods

Suspended luminaire for single luminaire applications. Suspended mounting via Y-wire suspension contained in scope of supply.

Optical system

With inner CDP-I microprismatics. Frosted PMMA cover with lateral light emission edge. Soft light effect with complete glare illumination. VDU-compliant according to EN 12464-1.

LED system

Luminaire luminous flux 9000 lm, connected load 81 W, luminous efficiency of luminaire 111 lm/W. Light colour neutral white, colour temperature 4000 K, colour rendering index Ra > 80. Service life L80(t_q 25 °C) = 70,000 h, service life L85(t_q 25 °C) = 50,000 h.

Luminaire body

Luminaire body of extruded aluminium profile. End caps of die-cast aluminium. Luminaire body white powder-coated. Dimensions (L x W): 1500 mm x 200 mm, luminaire height 45 mm.

Electrical connection


Wire suspension and electric connection cable included in scope of supply. Standard suspension length: 1500 mm.

Electrical version

With electronic transformer, digitally dimmable (DALI). Number of occupied DALI devices: 2.

Specification text

Exclusive rectangular suspended LED luminaire with rounded corners and visible light edge. Suspended luminaire for single luminaire applications. Suspended mounting via Y-wire suspension contained in scope of supply. With inner CDP-I microprismatics. Frosted PMMA cover with lateral light emission edge. Soft light effect with complete glare illumination. VDU-compliant according to EN 12464-1. Luminaire luminous flux 9000 lm, connected load 81 W, luminous efficiency of luminaire 111 lm/W. Light colour neutral white, colour temperature 4000 K, colour rendering index Ra > 80. Service life L80(t_q 25 °C) = 70,000 h, service life L85(t_q 25 °C) = 50,000 h. Luminaire body of extruded aluminium profile. End caps of die-cast aluminium. Luminaire body white powder-coated. Dimensions (L x W): 1500 mm x 200 mm, luminaire height 45 mm. Safety class I, protection rating IP20, impact resistance IK02/0,2 J, heat resistance 650 °C. Wire suspension and electric connection cable included in scope of supply. Standard suspension length: 1500 mm. With electronic transformer, digitally dimmable (DALI).




file TX050920
UGR I = 15.6
UGR q = 15.4
LFEC = F1

— c0-c180
— c90-c270



Colour	white (...01)
Weight	10.5 kg
Safety class	I
Hot wire test	650 °C
Impact resistance	0,2 J
Degree of protection	IP20
LFEC	F1
Cibse	BZ 2/2.5/BZ 3
LOR	1,00

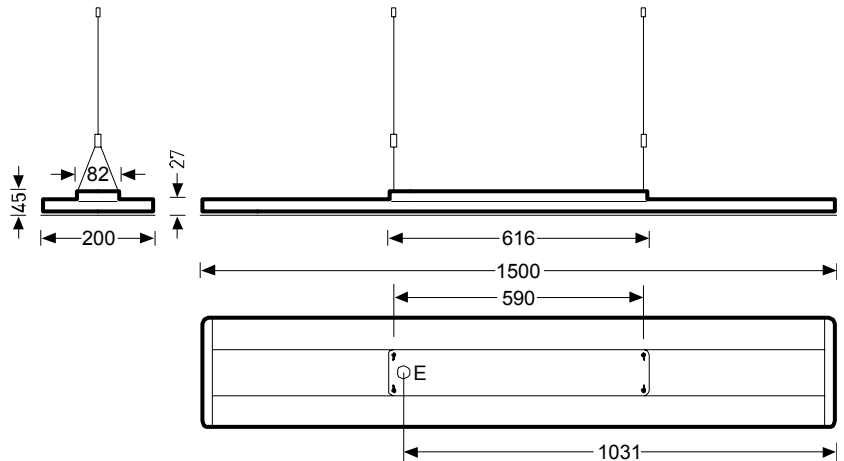

available accessories

TOC:	article
4601700	ZAA/01 Ans-Dose rund vp
4601800	ZAA/03 Ans-Dose rund vp
4691700	ZAE/01 515
4691800	ZAE/03 515