

# QLS410 LED

131-9414

1/3

**we-ef**



## Description

IP66, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lenses. Two cable entries.

<b>Beam Type</b>	symmetric, medium beam up and down
------------------	------------------------------------

<b>Lamp Type</b>	LED 2x3/12W / 700 mA - 4000 K
------------------	-------------------------------

<b>Gear Type</b>	EC
------------------	----

## Nominal Luminous Flux (lm)

LED Lumens	246 lm
------------	--------

LEDs	6
------	---

Total Lumens	1476 lm
--------------	---------

Tj	85 °C
----	-------

## Rated Luminous Flux (lm)

LED Lumens	165.8 lm
------------	----------

Total Lumens	995 lm
--------------	--------



Ta	25 °C
----	-------

<b>Rated Input Power</b>	15 W
--------------------------	------

# QLS410 LED

131-9414

2/3

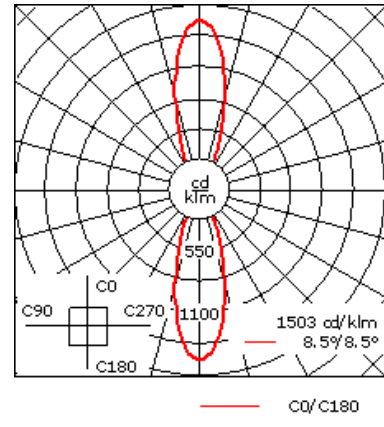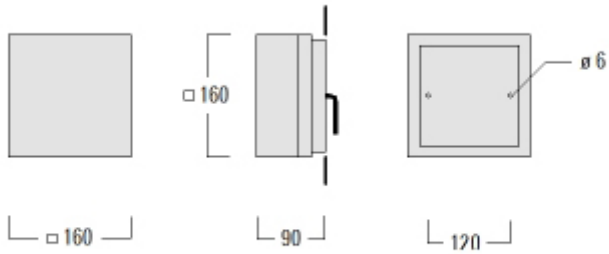

# QLS410 LED

131-9414

3/3

**we-ef**

---

## Electrical Accessories

---

### Analogue dimming interface

Analogue dimming interface

	Weight (kg)	L1
■ <b>430-0011</b> 1-10V analogue dimming interface	0.00	0



---

### DALI Interface

DALI Interface

	Weight (kg)	L1
■ <b>430-0013</b> DALI interface	0.00	0

