

DAC240-GB LED

134-1598

1/3

we-ef



Description



IP65, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. EC electronic converter in thermally separated compartment. Factory installed LED circuit board. Safety glass lens, hinged. Frame with safety catch. PMMA-LED lens array. 30° tilt and 355° rotatable. Two cable entries. One internal optical accessory.

Beam Type	-
Lamp Type	LED-12/18W / 500 mA - 3000 K
Gear Type	EC
Nominal Luminous Flux (lm)	
LED Lumens	184.8 lm
LEDs	12
Total Lumens	2217 lm
Tj	85 °C
Rated Luminous Flux (lm)	
LED Lumens	160.5 lm
Total Lumens	1926.2 lm
Ta	25 °C
Rated Input Power	21 W

DAC240-GB LED

134-1598

2/3

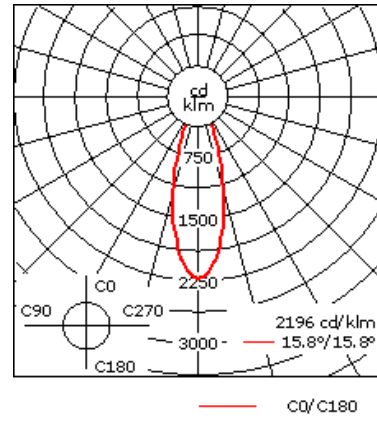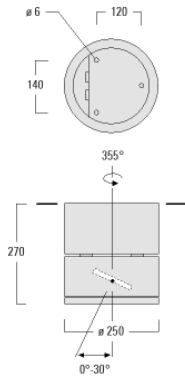

Material Specification

Body:	Marine-grade die-cast aluminium alloy
Weight (kg):	8.50
Lens:	Safety glass lens, hinged
Gasket:	Silicone rubber gasket
Fasteners:	PCS Polymer Coated Stainless Steel Hardware
Ingress protection:	IP65
Impact protection:	IK07
Corrosion protection:	5CE

Electrical Specification

Power supply:	220-240V / 50-60 Hz
Ballast:	Integral EC electronic converter in thermally-separated compartment
Cable:	Two cable entries

Optical Accessories

Surface wash lens IO-360

Broadens light distribution in all planes. Does not fit in combination with [B] lens.

C1

■ **134-1442** Flood lens IO-360

98



C1


Linear spread lens IO-180

Broadens light distribution in one plane only. Does not fit in combination with [B] lens.

C1

■ **185-2632** Linear spread lens IO-180

98



C1