

QLS410 LED

131-9408

1/3

we-ef



Description

IP66, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lenses. Two cable entries.

Beam Type	symmetric, narrow beam up and side-throw down
------------------	---

Lamp Type	LED 2x3/12W / 700 mA - 3000 K
------------------	-------------------------------

Gear Type	EC
------------------	----

Nominal Luminous Flux (lm)

LED Lumens	246 lm
------------	--------

LEDs	6
------	---

Total Lumens	1476 lm
--------------	---------

Tj	85 °C
----	-------

Rated Luminous Flux (lm)

LED Lumens	171.2 lm
------------	----------

Total Lumens	1027.1 lm
--------------	-----------



Ta	25 °C
----	-------

Rated Input Power	15 W
--------------------------	------

QLS410 LED

131-9408

2/3

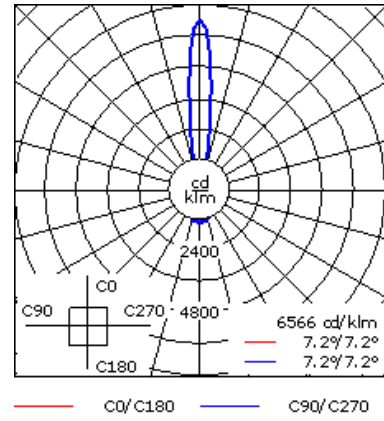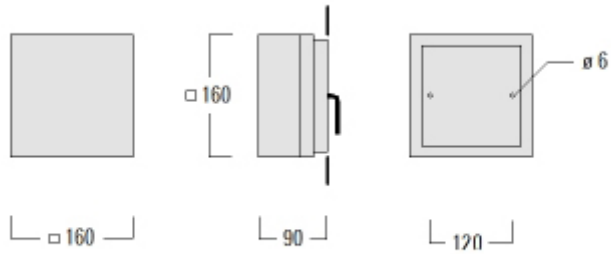

QLS410 LED

131-9408

3/3

we-ef

Electrical Accessories

Analogue dimming interface

Analogue dimming interface

	Weight (kg)	L1
■ 430-0011 1-10V analogue dimming interface	0.00	0



DALI Interface

DALI Interface

	Weight (kg)	L1
■ 430-0013 DALI interface	0.00	0

