

# QLS410 LED

131-9421

1/3

**we-ef**



## Description

IP66, Class I, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lenses. Two cable entries.

<b>Beam Type</b>	symmetric, narrow beam
------------------	------------------------

<b>Lamp Type</b>	LED-3/6W / 700 mA - 4000 K
------------------	----------------------------

<b>Gear Type</b>	EC
------------------	----

## Nominal Luminous Flux (lm)

LED Lumens	246 lm
------------	--------

LEDs	3
------	---

Total Lumens	738 lm
--------------	--------

Tj	85 °C
----	-------

## Rated Luminous Flux (lm)

LED Lumens	185.7 lm
------------	----------

Total Lumens	557.2 lm
--------------	----------



Ta	25 °C
----	-------

<b>Rated Input Power</b>	8.5 W
--------------------------	-------

# QLS410 LED

131-9421

2/3

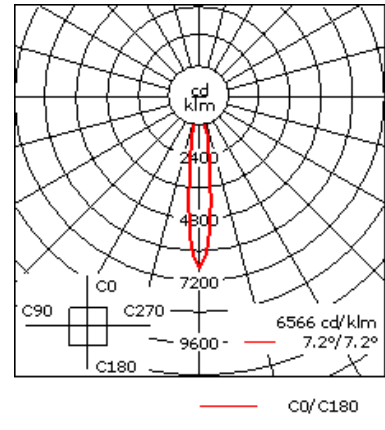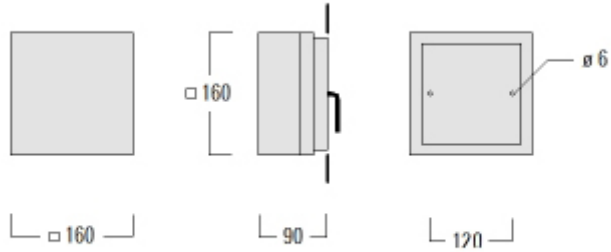

# QLS410 LED

131-9421

3/3

**we-ef**

---

## Electrical Accessories

---

### Analogue dimming interface

Analogue dimming interface

	Weight (kg)	L1
■ <b>430-0011</b> 1-10V analogue dimming interface	0.00	0



---

### DALI Interface

DALI Interface

	Weight (kg)	L1
■ <b>430-0013</b> DALI interface	0.00	0

