

Product information 74R WD2 LED2000-830 ET TOC: 6858140



Luminaire type

Round surface-mounted LED luminaire with opal PMMA diffuser.

Applications

For entrance areas, corridors, stairways, lounges, hotels, restaurants and residential zones.

Mounting methods

For wall or ceiling mounting.

Optical system

With round, spherically-shaped diffuser, slightly flattened on the luminaire head, opal.

LED system

Luminaire luminous flux 2100 lm, connected load 20 W, luminous efficiency of luminaire 105 lm/W. Light colour warm white, colour temperature 3000 K, colour rendering index $R_a > 80$. Service life $L_{80} (t_q 25\text{ }^\circ\text{C}) = 50,000\text{ h}$.

Luminaire body


Luminaire body of sheet steel, white, powder-coated. Diameter of diffuser $\varnothing 420$ mm. Luminaire for accommodating diverse optional decorative accessories, suitable for creating own design variants.

Electrical version

With electronic transformer, switchable.

Specification text

Round surface-mounted LED luminaire with opal PMMA diffuser. For wall or ceiling mounting. With round, spherically-shaped diffuser, slightly flattened on the luminaire head, opal. Luminaire luminous flux 2100 lm, connected load 20 W, luminous efficiency of luminaire 105 lm/W. Light colour warm white, colour temperature 3000 K, colour rendering index $R_a > 80$. Service life $L_{80} (t_q 25\text{ }^\circ\text{C}) = 50,000\text{ h}$. Luminaire body of sheet steel, white, powder-coated. Diameter of diffuser $\varnothing 420$ mm. Luminaire for accommodating diverse optional decorative accessories, suitable for creating own design variants. Safety class I, protection rating IP40, impact resistance IK02/0,2 J, heat resistance 650 $^\circ\text{C}$. With electronic transformer, switchable.




file TX050621
UGR I = 19.4
UGR q = 19.4
LFEC = F0

— c0-c180
— c90-c270



Colour	white (...01)
Weight	1.44 kg
Safety class	I
Hot wire test	650 $^\circ\text{C}$
Impact resistance	0,2 J
Degree of protection	IP40
LFEC	F0
Cibse	BZ 5
LOR	1,00

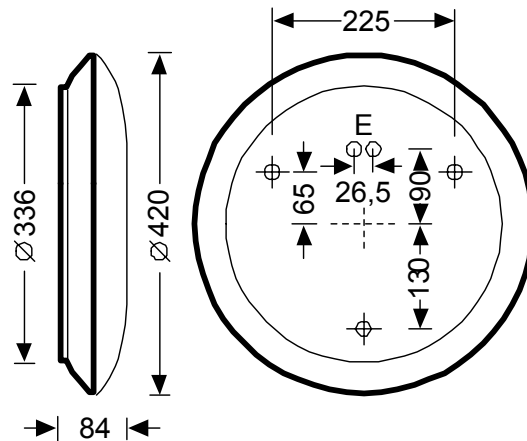

available accessories

TOC:	article
6912300	074R WD2 DA Curve 01
6913600	074R WD2 DA Curve neongreen
6912400	074R WD2 DA Curve T0
6912500	074R WD2 DA Curve T1
6912600	074R WD2 DA Curve T2
6912700	074R WD2 DA Curve T3
6912800	074R WD2 DA Curve T4
6912900	074R WD2 DA Curve T5
6913400	074R WD2 DA Disk Decor
6913500	074R WD2 DA Disk neongreen
6913000	074R WD2 ZS 3075/1000
6913100	074R WD2 ZS 3075/2000
6913200	074R WD2 ZS 5075/1000
6913300	074R WD2 ZS 5075/2000