

Product information SFlow-Act H2-L MRWD LED6400 ETDD 03

TOC: 6977051



Luminaire type

Suspended LED luminaire for single use or continuous line applications. Luminaire with Activ equipment for controlling light colour via separate control unit.

Applications

For the innovative lighting of meeting zones, corridors, prestigious ancillary areas and in the health sector.

Mounting methods

For suspended mounting. As single luminaire or for continuous line use.

Optical system

Optical system with micro-reflector technology (MRWD) and highly efficient, white-polished plastic reflector chambers with diffuser cover for uniform illumination and maximum visual comfort. With additional clear cover integrated in the optical system, flush fits on the room side and protects the LEDs. Discreet lateral light emission over the complete luminaire length. With direct-indirect light distribution.

LED system

Luminaire luminous flux 6300 lm, connected load 50 W, luminous efficiency of luminaire 126 lm/W. Light colour variable (warm white - daylight white), colour temperature variable (2700 K - 6500 K), colour rendering index Ra > 80.

Luminaire body

Luminaire body of sheet steel, silver-grey powder-coated. Dimensions (L x W): 1413 mm x 84 mm, luminaire height 45 mm.

Electrical version


With electronic transformer, digitally dimmable (DALI).

Accessories

Connection cables, end caps, continuous line couplings, wire suspensions and ceiling rose must be ordered separately.

Specification text

Suspended LED luminaire for single use or continuous line applications. Luminaire with Activ equipment for controlling light colour via separate control unit. For suspended mounting. As single luminaire or for continuous line use. Optical system with micro-reflector technology (MRWD) and highly efficient, white-polished plastic reflector chambers with diffuser cover for uniform illumination and maximum visual comfort. With additional clear cover integrated in the optical system, flush fits on the room side and protects the LEDs. Discreet lateral light emission over the complete luminaire length. With direct-indirect light distribution. Luminaire luminous flux 6300 lm, connected load 50 W, luminous efficiency of luminaire 126 lm/W. Light colour variable (warm white - daylight white), colour temperature variable (2700 K - 6500 K), colour rendering index Ra > 80. Luminaire body of sheet steel, silver-grey powder-coated. Dimensions (L x W): 1413 mm x 84 mm, luminaire height 45 mm. Safety class I, protection rating IP20, impact resistance IK02/0,2 J, glow wire resistance 650 °C. With electronic transformer, digitally dimmable (DALI).




file TX054327
UGR I = 19.6
UGR q = 19.9
LFEC = F1

— c0-c180
— c90-c270



Colour	silver grey (...03)
Weight	4.89 kg
Safety class	I
Hot wire test	650 °C
Impact resistance	0,2 J
Degree of protection	IP20
LFEC	F1
Cibse	BZ 2/1.75/BZ 3
LOR	1,00

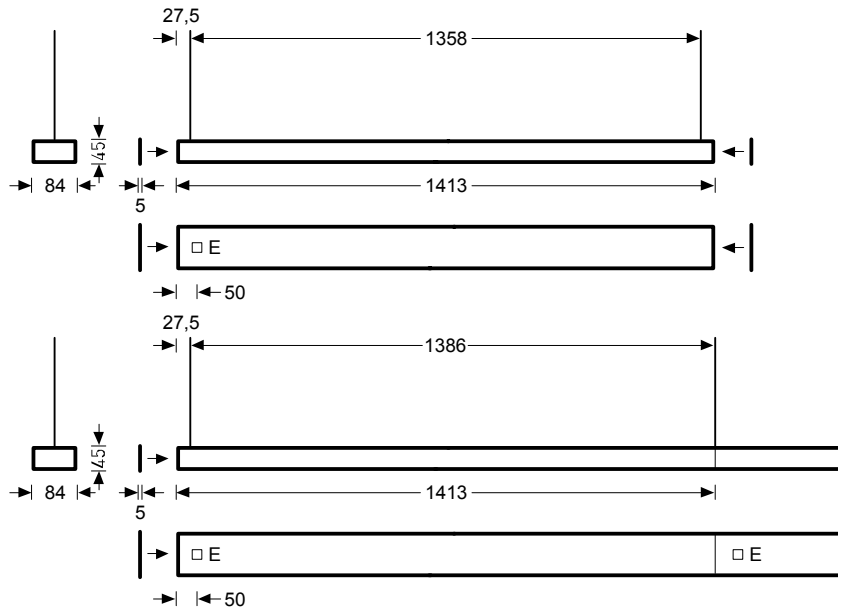

available accessories

TOC:	article
2926500	03630S Sauger
6472000	LMS WW Control Panel
6472200	LMS WW DALI Interface IRD200
6892300	SFlow D/H ZKS 01
6892400	SFlow D/H ZKS 03
6892200	SFlow H ZLK
6892000	SFlow H ZZT/515/1000
6892100	SFlow H ZZT/515/2000
4691700	ZAE/01 515
4691800	ZAE/03 515
5638900	ZS1P 2000 Seilaufhängung