

ELEMENTS H TRACK



APPLICATIONS

- Residential
- Offices
- Hallways

FEATURES

- The Element Track system is a 3 phase mixed system with two additional conductors intended to manage a general data signal (for example DALI, dmx, lon, eib).
- Based on the Eurostandard Plus® platform
- Suitable for use with Global Trac® adapters
- Three circuit and DALI compatible
- An easy to create and design linear system
- Available in black, white or anodised.

TECHNICAL DATA

MOUNTING	Suspended
MATERIALS	Aluminium
DIMENSIONS	W 31.4mm x H 83mm
FREQUENCY	50-60Hz
RATED CURRENT & VOLTAGE	16A-440V 1A-50Vac FELV
IP RATING	IP20
WARRANTY	5 Years


FINISH




INDIRECT LIGHTING

WATTAGE	6 W/m 12 W/m 18 W/m 30 W/m
CCT	3000K 4000K Tunable & RGBW available on request
CONTROL	Non Dim DALI Casambi


DIMENSIONAL DIAGRAMS

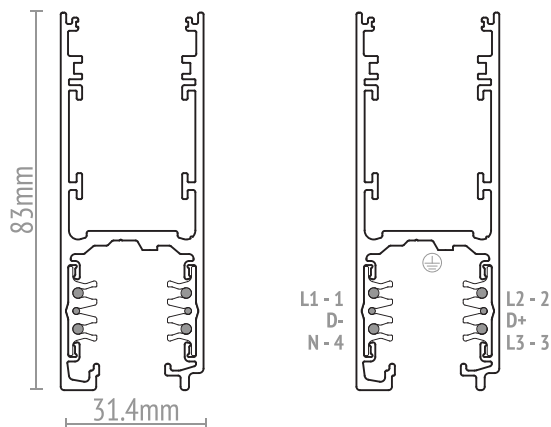

ELECTRICAL SCHEME

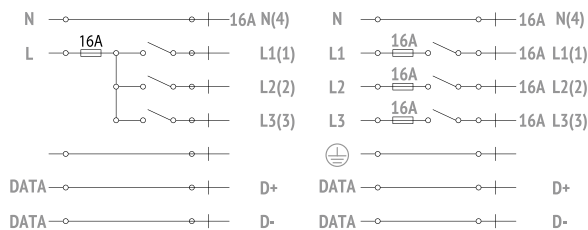

SUSPENDED LOAD SCHEME

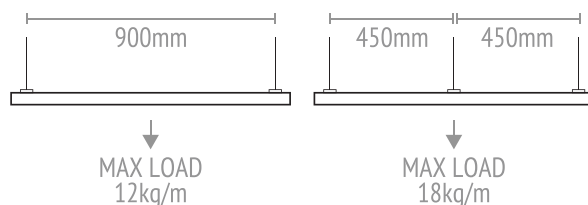

ELEMENTS H TRACK



ACCESSORIES

* Available in Black, White or Grey

<p>END-CAP ST9004-H*</p>			<p>END-FEED ST9001-H* (Pol R) ST9002-H* (Pol L)</p>		
<p>COVER STRIP S-9000*</p>			<p>JOINTING CONNECTOR ST9003-H*</p>		
<p>END CAP FOR END-FEED WITH HOLE FOR POWER CABLE S-9001/H-C3-93-P</p>			<p>INSULATING CONNECTOR ST9003-M*</p>		
<p>END CAP FOR END-FEED S-9001/H-C3-93</p>			<p>MIDDLE FEED ST9010-H*</p>		
<p>L FEED ST9011-H* (Pol In, Earth Ex) ST9012-H* (Pol Ex, Earth In)</p>			<p>T FEED ST9013-H* (Pol Ex L, Earth In R) ST9014-H* (Pol Ex R, Earth In L) ST9015-H* (Pol In L, Earth Ex R) ST9016-H* (Pol In R, Earth Ex L)</p>		
<p>X FEED ST9017*</p>					

ELEMENTS H TRACK



ACCESSORIES

* Available in Black, White or Grey

<p>ROD CLAMP ST9000-P2* <i>(to be used with P3, P5 & 6)</i></p>			<p>OPAL SCREEN COVER TL=70% S-9000/H-C1-OP</p>		
<p>ROD SUSPENSION KIT ST9000-P3* <i>(1.5m, 3m or 5m)</i></p>			<p>OPAL SCREEN COVER TL=76% S-9000/H-C2-OP</p>		
<p>ROD SUSPENSION KIT WITH METAL CUP AND CROSSBAR ST9000-P5* <i>(1.2m & not in available in grey)</i></p>			<p>OPAL SCREEN COVER S-9000/H-C3-OP</p>		
<p>ROD SUSPENSION KIT WITH METAL CUP AND CEILING BRACKET ST9000-P6* <i>(1.2m & not in available in grey)</i></p>			<p>MICROPRISMATIC SCREEN COVER TL=87% S-9300/MIC</p>		
<p>WIRE SUSPENSION KIT WITH METAL CUP AND CEILING BRACKET ST9000-P1* <i>(1.5m, 3m or 5m)</i></p>			<p>OPAL SCREEN COVER TL=85% S-9300/OP</p>		
<p>WIRE SUSPENSION KIT WITH CEILING BRACKET ST9000-P4 <i>(1m)</i></p>			<p>OPAL SCREEN COVER TL=56% S-9300/OPN</p>		
<p></p>			<p>OPAL SCREEN COVER TL=74% SS-9300/OPS</p>		
<p></p>			<p>LED SUPPORT S-5033</p>		